


EQUAL TEES

ISO WITH BRANCH

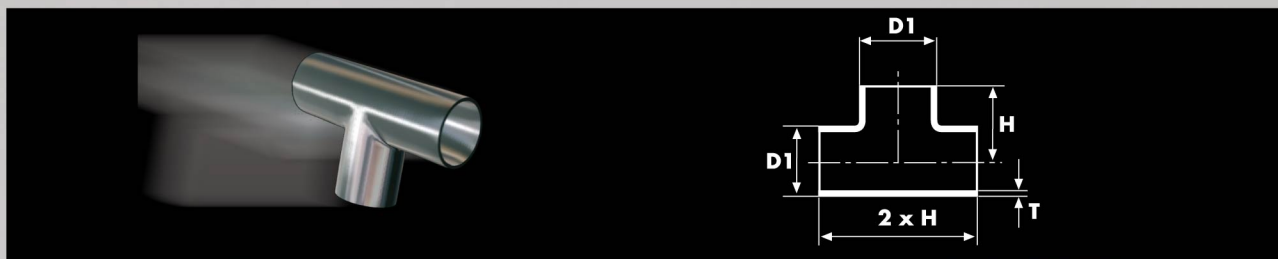

DN	D1	H	Weight T=1,5	Weight T=2	Weight T=3
8	13,5	25,5	0,030	-	-
10	17,2	25,5	0,032	0,035	-
15	21,3	25,5	0,041	0,055	-
20	26,9	28,5	0,059	0,079	-
25	33,7	38	0,102	0,137	0,215
32	42,4	47,5	0,167	0,233	0,344
40	48,3	57	-	0,307	0,463
50	60,3	63,5	-	0,408	0,612
65	76,1	76	-	0,603	0,941
80	88,9	85,5	-	0,860	1,263
100	114,3	105	-	1,268	1,981
125	139,7	124	-	1,856	2,783
150	168,3	143	-	2,984	3,808
200	219,1	178	-	4,337	6,505
250	273,0	216	-	5,800	8,700

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404


Wall Thickness stock range 1,5mm ÷ 3mm

Wall Thickness production range 1,5mm ÷ 6mm

We can also produce all kind of reducing tees

EQUAL TEES

ISO V WELDED

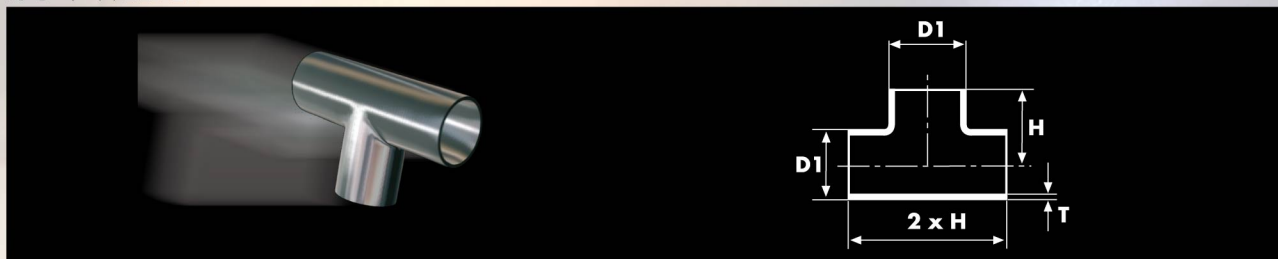


DN	D1	H	Weight T=2	Weight T=3	Weight T=4
250	273,0	216	5,80	8,70	10,47
300	323,9	254	12,35	18,53	24,68
350	355,6	279	14,77	22,16	29,52
400	406,4	305	-	27,92	37,20
450	457,2	343	-	35,35	47,10
500	508,0	381	-	43,64	58,16
600	609,6	432	-	62,84	83,78
700	711,2	1042	-	127,35	169,80
800	812,8	1194	-	167,46	223,28
900	914,4	1346	-	212,00	282,66
1000	1016,0	1498	-	261,77	349,03

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404

Wall Thickness range 2mm ÷ 10mm

We can also produce all kind of reducing tees

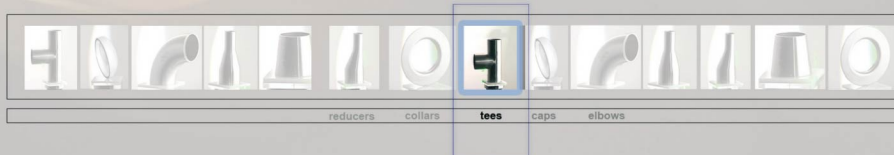

EQUAL TEES

METRIC WITH BRANCH



D1	H	T	Weight	D1	H	T	Weight
18	25,5	1,5	0,038	63,5	63,5	1,5	0,353
20	25,5	1,5	0,042	64	63,5	2	0,430
23	25,5	1,5	0,047	69	63,5	2	0,475
25	28,5	1,5	0,056	73	76	1,5	0,580
28	28,5	1,5	0,067	74	76	2	0,594
30	38	1,5	0,110	76	76	1,5	0,668
30	38	2	0,118	84	85,5	2	0,772
33	38	1,5	0,140	86	85,5	3	1,158
34	38	2	0,148	104	105	2	1,191
38	47,5	1,5	0,181	106	105	3	1,469
43	47,5	1,5	0,223	129	124	2	1,760
44	47,5	2	0,230	131	124	3	1,993
44,5	47,5	1,5	0,232	154	143	2	2,032
44,5	47,5	2	0,235	156	143	3	2,987
50,8	57	1,5	0,239	204	178	2	3,836
53	57	1,5	0,242	206	178	3	5,721
54	57	2	0,338	254	250	2	7,210
				256	250	3	9,030

EQUAL TEES

METRIC WITH BRANCH (SPECIAL SIZE)


D1	H	T	Weight
57	57	2	0,420
80	85,5	2	0,800
101,6	105	2	1,300
101,6	105	3	1,950
108	105	2	1,400
108	105	3	2,050
123	124	1,5	1,780
133	124	2	1,850
133	124	3	2,770
159	143	2	2,800
159	143	3	4,200

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404
 Wall thickness stock range 1,5mm ÷ 3mm
 We can also produce all kind of reducing tees



EQUAL TEES

METRIC V WELDED

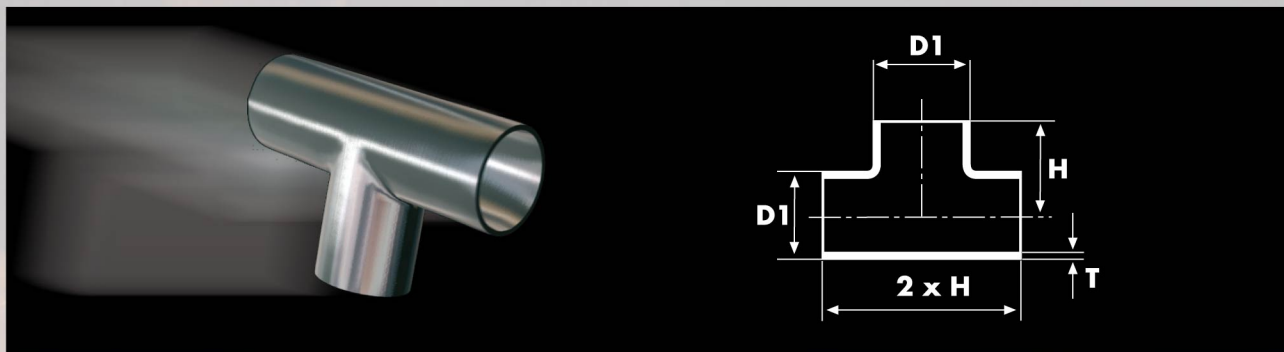


D1	H	T	Weight	D1	H	T	Weight
254	250	2	7,210	508	500	4	57,700
256	250	3	9,030	606	600	3	62,230
304	300	2	10,407	608	600	4	82,980
306	300	3	15,610	706	700	3	84,620
354	350	2	14,147	708	700	4	112,830
356	350	3	21,220	806	800	3	112,180
406	400	3	27,680	808	800	4	149,420
408	400	4	37,000	906	900	3	157,500
456	450	3	35,010	908	900	4	189,000
458	450	4	46,780	1006	1000	3	174,740
506	500	3	43,190	1008	1000	4	232,990

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404

Wall thickness stock range 2mm ÷ 3mm


Wall thickness production range 2mm ÷ 10mm

We can also produce all kind of reducing tees

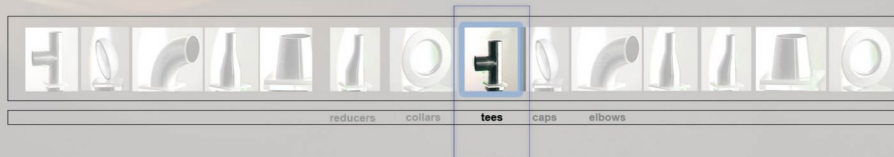

EQUAL TEES


DAIRY SMS WITHOUT BRANCH

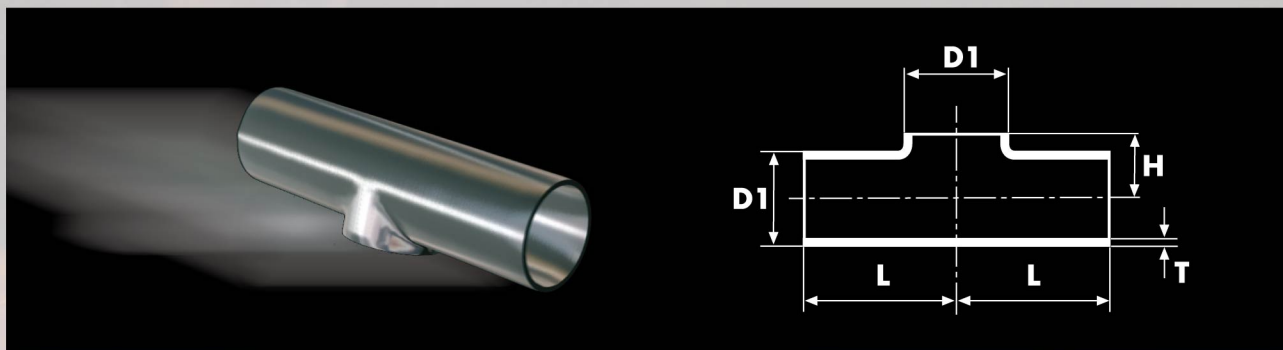

D1	L	H	T	Weight
25	55	14	1,2 / 1,5	0,095
38	70	22	1,2 / 1,5	0,155
51	82	28	1,2 / 1,5	0,225
63,5	105	35	1,6 / 2,0	0,455
76,1	110	43	1,6 / 2,0	0,610
104/101,6	150	58	2	1,410

EQUAL TEES

DAIRY SMS WITH BRANCH

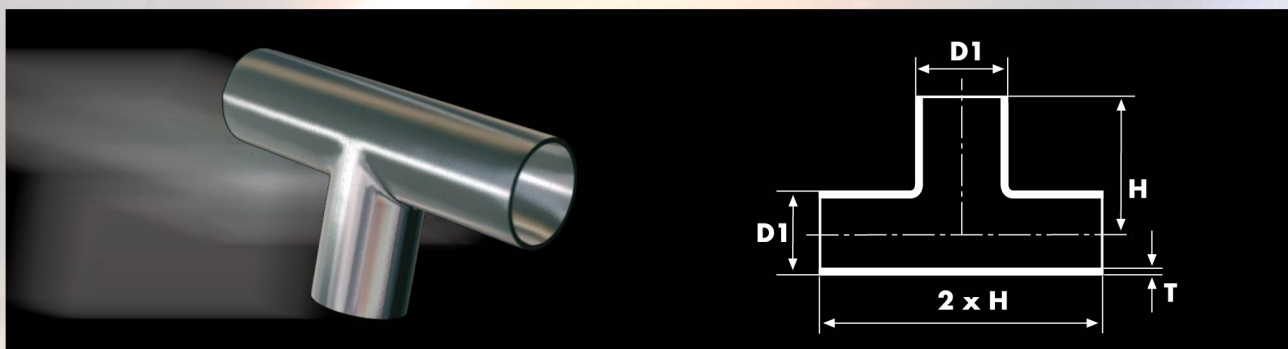

D1	H	T	Weight
25	55	1,2 / 1,5	0,140
38	70	1,2 / 1,5	0,230
51	82	1,2 / 1,5	0,330
63,5	105	1,6 / 2,0	0,680
76,1	110	1,6 / 2,0	0,910
104/101,6	150	2	2,100


Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404
We can also produce all kind of reducing tees

Surface finish

Outside
Descaled
Brushed
Polished grind 220/240
Mirror polished


Inside
Descaled
Brushed
Ra 0,8

Ask for more possibilities

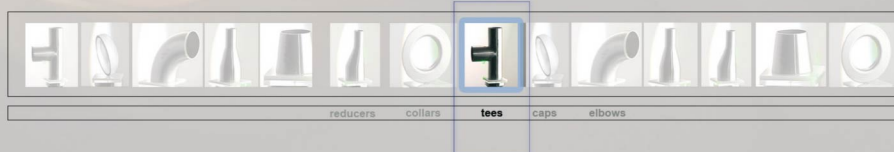


EQUAL TEES

DAIRY SMS ISO STANDARD

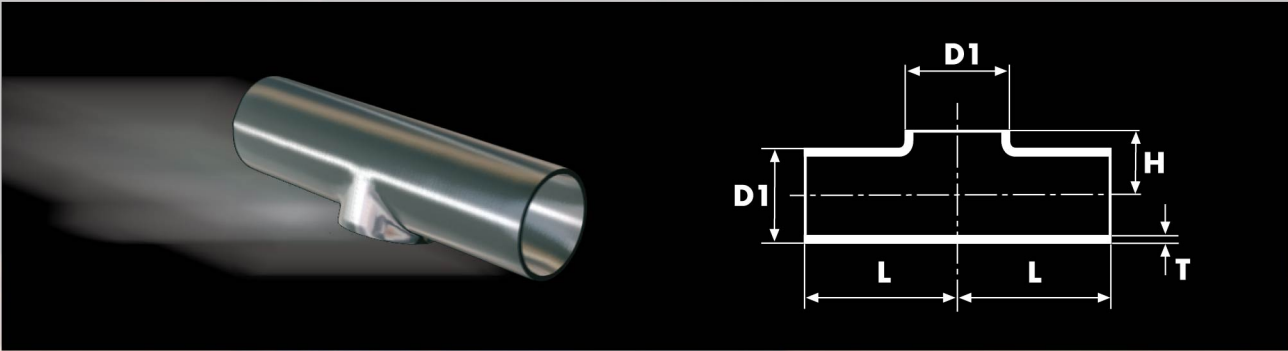

Pulled Equal Tees Sms Iso without branch

D1	L	H	T
25	44	14	1,2
38	64	22	1,2
51	89	29	1,2
63,5	114	35	1,6
76,1	134	41	1,6
101,6	174	55	2

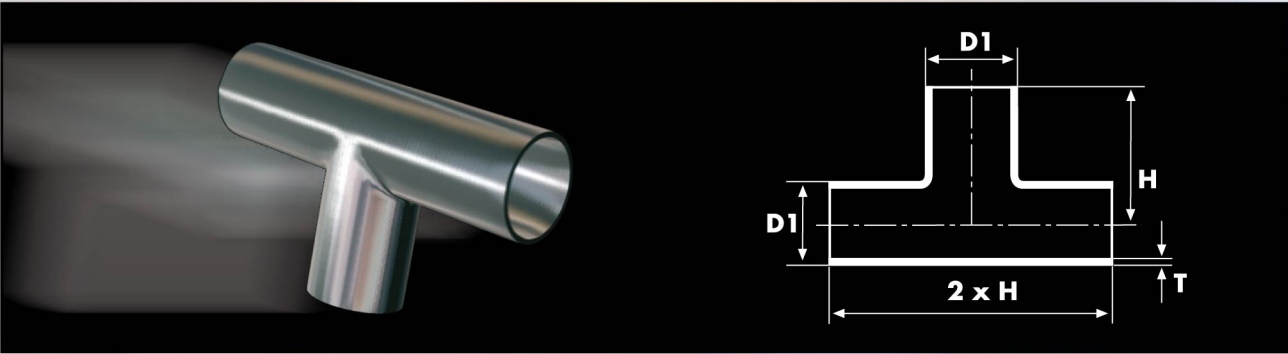

Drawn Equal Tees Sms Iso with branch

D1	H	T
25	44	1,2
38	64	1,2
51	89	1,2
63,5	114	1,6
76,1	134	1,6
101,6	174	2

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404
We can also produce all kind of reducing tees

Surface finish


Outside	Inside
Descaled	Descaled
Brushed	Brushed
Polished grind 220/240	Ra 0,8
Mirror polished	

Ask for more possibilities



EQUAL TEES

DAIRY OLD DIN WITH BRANCH

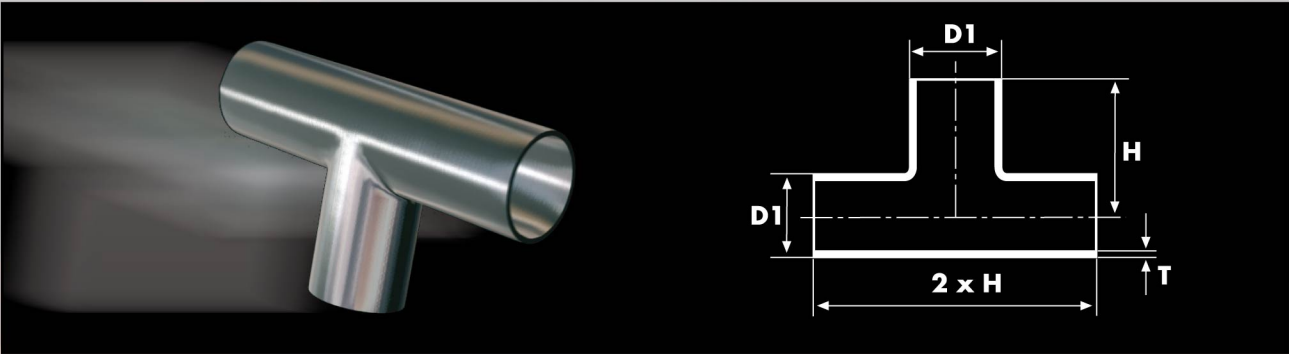

DN	D1	H	T	Weight
15	18	35	1,2 / 1,5	0,085
20	22	40	1,2 / 1,5	0,095
25	28	50	1,2 / 1,5	0,150
32	34	55	1,2 / 1,5	0,180
40	40	60	1,2 / 1,5	0,240
50	52	70	1,2 / 1,5	0,330
65	70	80	1,6 / 2,0	0,680
80	85	90	2	1,070
100	104	100	2	1,400
125	129	125	2	1,800
150	154	143	2	2,800

EQUAL TEES

DAIRY NEW DIN WITH BRANCH

DN	D1	H	T	Weight
15	19	35	1,2 / 1,5	0,085
20	23	40	1,2 / 1,5	0,095
25	29	50	1,2 / 1,5	0,150
32	35	55	1,2 / 1,5	0,180
40	41	60	1,2 / 1,5	0,240
50	53	70	1,2 / 1,5	0,330

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404

We can also produce all kind of reducing tees

Surface finish

Outside
Descaled
Brushed
Polished grind 220/240
Mirror polished


Inside
Descaled
Brushed
Ra 0,8

Ask for more possibilities



EQUAL TEES


ISO EN 10253-3

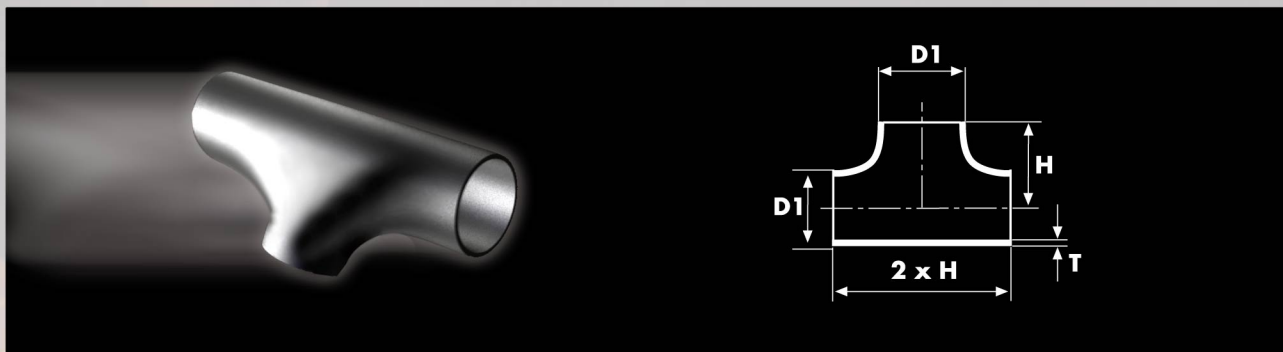

DN	D1	H	Weight T=1,6	Weight T=2	Weight T=2,3	Weight T=2,6	Weight T=2,9	Weight T=3,2	Weight T=3,6	Weight T=4,0
15	21,3	25,2	0,044	0,055	0,063	0,072	-	-	-	-
20	26,9	28,5	0,094	0,118	0,136	0,153	-	-	-	-
25	33,7	38	0,120	0,150	0,173	0,195	0,218	0,240	-	-
32	42,4	47,6	0,256	0,320	0,368	0,416	0,464	0,512	-	-
40	48,3	57,2	0,354	0,442	0,508	0,575	0,641	0,707	-	-
50	60,3	63,5	0,466	0,582	0,669	0,757	0,844	0,931	-	-
65	76,1	76	-	0,603	0,693	0,784	0,874	0,965	-	-
80	88,9	86	-	0,680	0,782	0,884	0,986	1,088	-	-
100	114,3	105	-	-	-	1,647	1,837	2,027	2,280	-
125	139,7	124	-	-	-	2,427	2,707	2,987	3,360	3,733
150	168,3	143	-	-	-	3,293	3,673	4,053	4,560	5,067
200	219,1	178	-	-	-	5,633	6,283	6,933	7,800	8,667

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404


We can also produce all kind of reducing tees

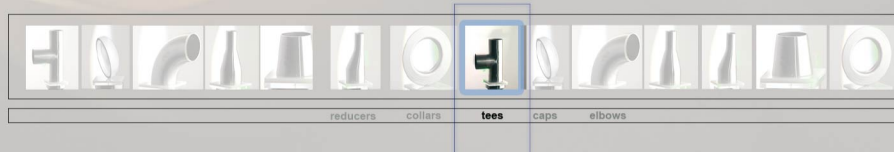

Berellesi Berinox Tel. +39.02.98.23.10.72 Fax +39.02.98.39.103

BRANCH WELDED TEES


ISO EN 10253-3

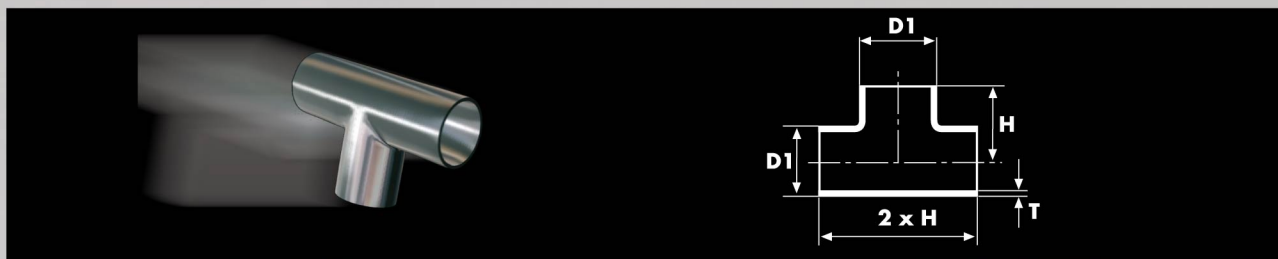

DN	D1	H	Weight T=2	Weight T=3	Weight T=4
50	60,3	125	0,803	1,205	-
65	76,1	140	1,111	1,666	-
80	88,9	150	1,509	2,263	-
100	114,3	160	1,932	2,898	-
125	139,7	180	2,694	4,041	-
150	168,3	200	4,173	6,260	-
200	219,1	250	6,091	9,137	-
250	273	300	7,269	10,903	14,53
300	323,9	330	16,050	24,074	32,06
350	355,6	360	19,062	28,594	38,09
400	406,4	400	-	36,616	48,78
450	457	450	-	46,378	61,79
500	508	500	-	57,270	76,33
600	610	600	-	87,271	116,36
700	711	700	-	85,552	114,07
800	813	800	-	112,201	149,60
900	914	900	-	141,750	189,00
1000	1016	1000	-	174,748	233,00


Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404

We can also produce all kind of reducing tees

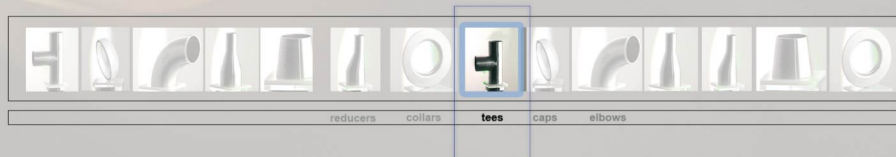

EQUAL TEES

METRIC EN 10253-3

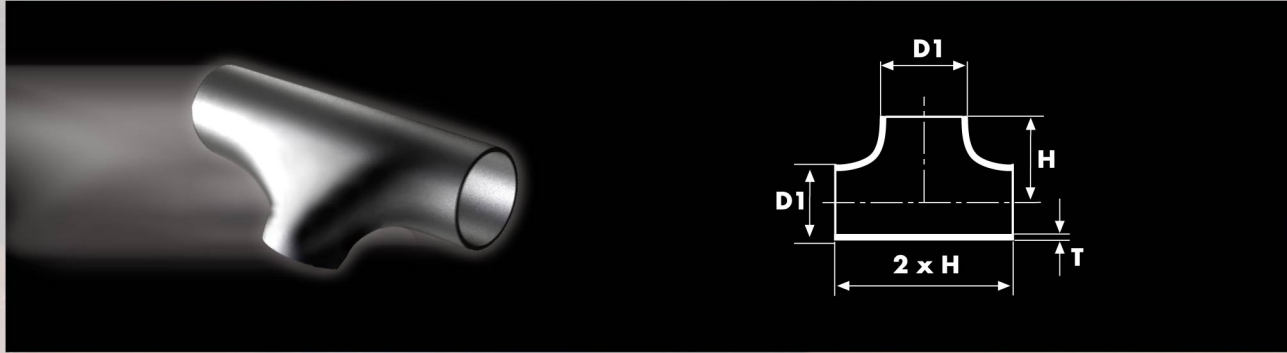

D	H	T	Weight
20	23	2	0,066
23	25	1,5	0,076
24	25	2	0,090
25	33	2	0,111
28	33	1,5	0,127
30	38	2	0,143
35	50	1,5	0,175
38	50	1,5	0,186
38	50	2	0,243
43	60	1,5	0,264
44,5	60	2	0,352
53	73	1,5	0,383
54	73	2	0,512
55	76	2	0,566
57	76	3	0,853
69	80	2	0,700
79	80	2	0,750
84	80	2	0,802
86	80	3	1,240
104	90	2	1,302
106	90	3	2,161
129	115	2	2,103
131	115	3	3,362
154	135	2	3,120
156	135	3	4,802
204	175	2	4,885
206	175	3	8,208


Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404

We can also produce all kind of reducing tees



BRITISH STANDARD PULLED TEES


TO BS 4825 Pt2

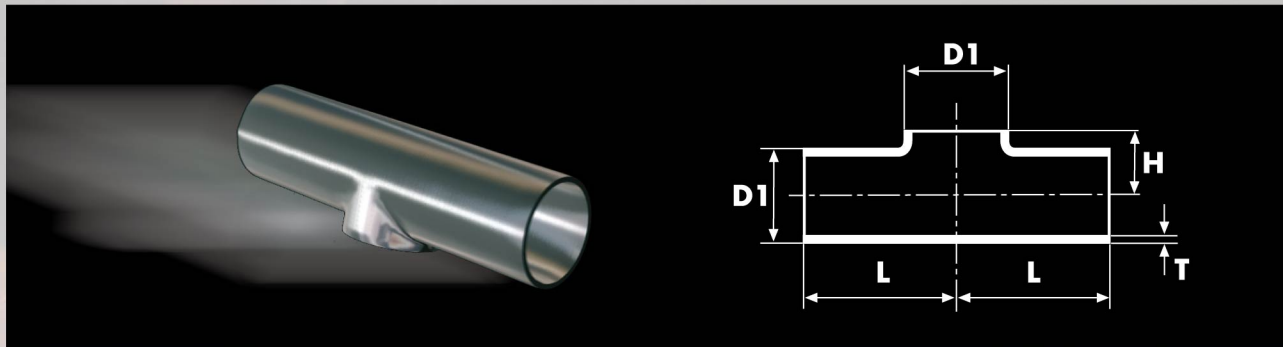

D1	L	H	T	Weight
25,4	44	14	1,5/1,6	0,060
38,1	64	22	1,5/1,6	0,105
50,8	89	29	1,5/1,6	0,244
63,5	114	35	1,5/1,6	0,494
76,2	134	41	1,5/1,6	0,920
101,6	174	55	2,0	1,250

BRITISH STANDARD FULL EQUAL TEES

TO BS 4825 Pt2

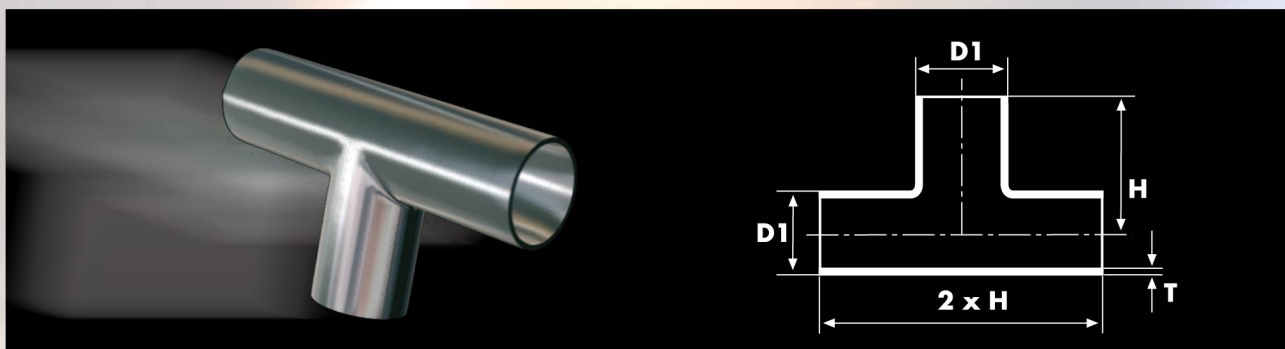

D1	H	T	Weight
25,4	44	1,5/1,6	0,070
38,1	64	1,5/1,6	0,210
50,8	89	1,5/1,6	0,358
63,5	114	1,5/1,6	0,738
76,2	134	1,5/1,6	1,020
101,6	174	2,0	2,200

Standard grades 304/1.4301, 304L/1.4307, 316/1.4401, 316L/1.4404

Surface finish

Outside
 Descaled
 Brushed
 Polished grind 220/240
 Mirror polished

Inside
 Descaled
 Brushed
 Ra 0,8

Ask for more possibilities

